


marzocchi

WWW.MARZOCCHI.COM

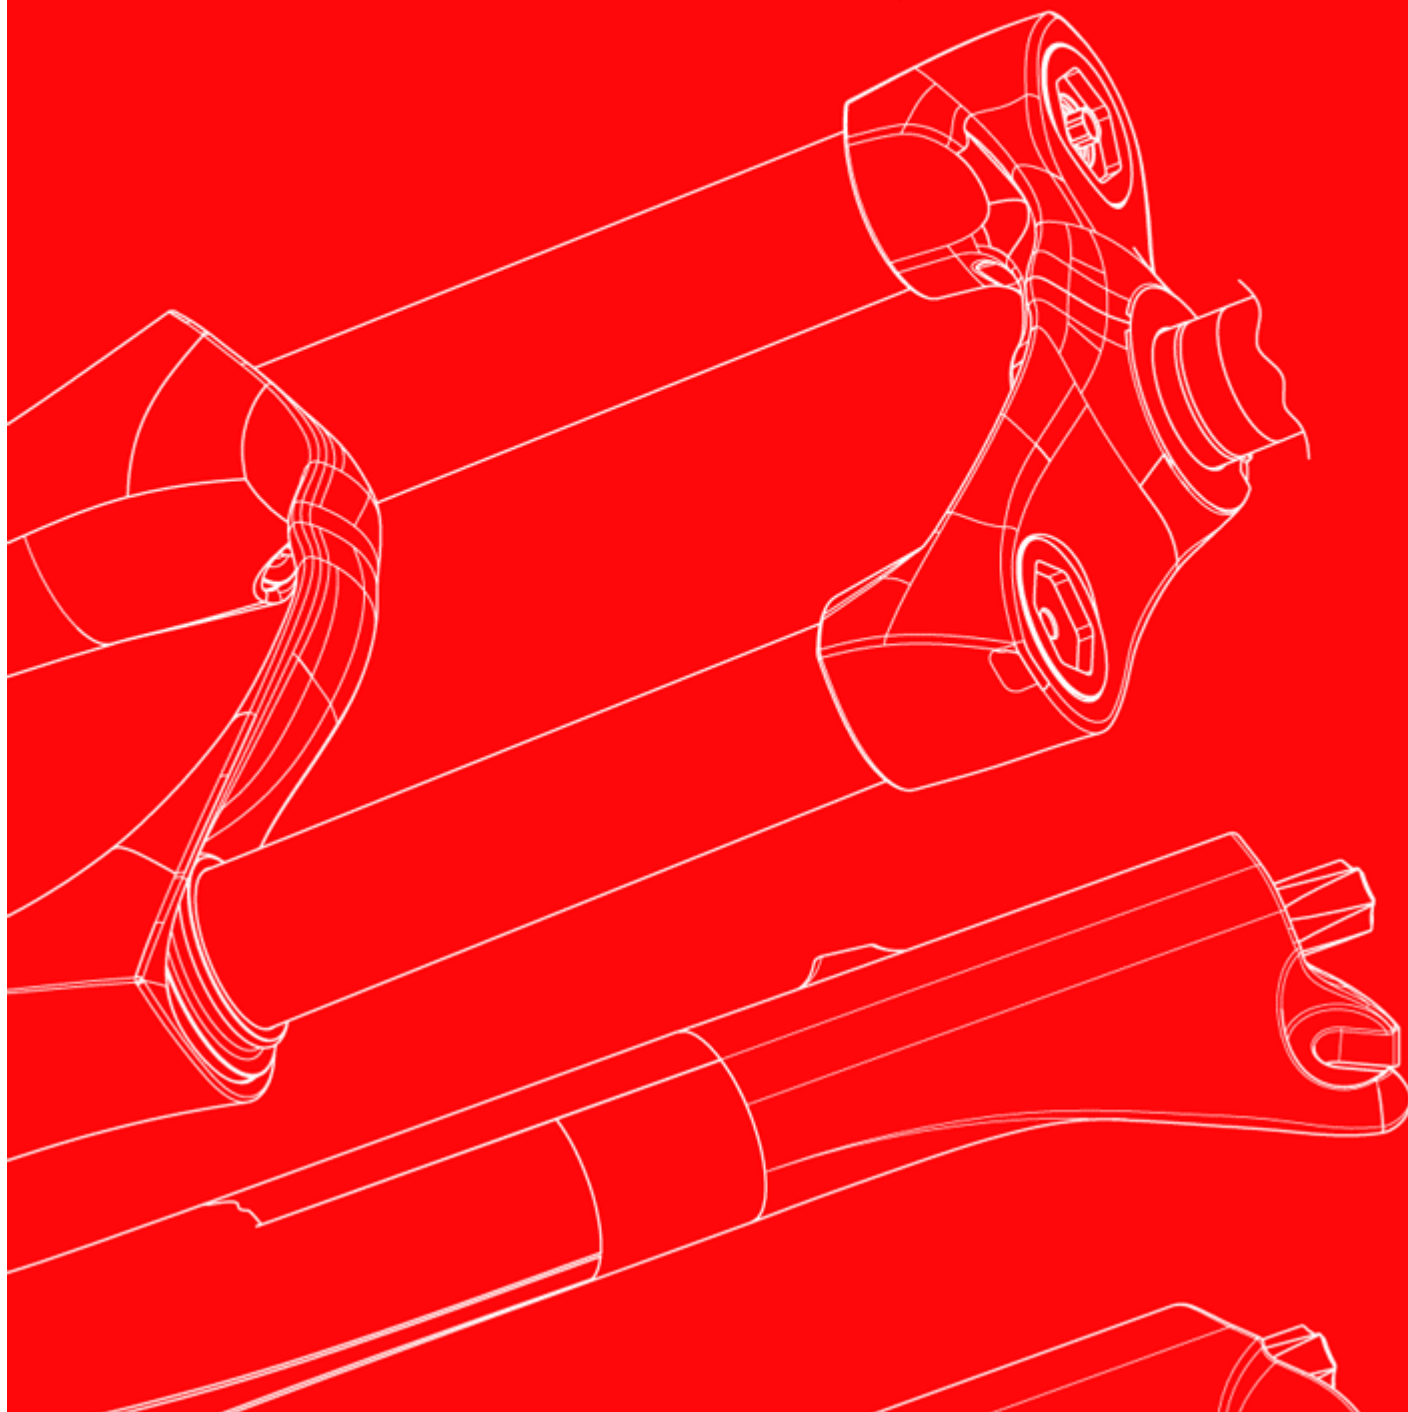

2008 - 888 RCV

Technical instructions

Spare part list - 888 RCV

Rif.	Code	Description	Q.ty in the model
1	7051255/R	LOWER CROWN D.38-888 '08	1
2	501571-TW	UPPER CROWN-888 D.38 '08	1
3	507785NZ	BLK STANCHION 38X550-888 '08	2
4	531104	RUBBER D38 -888 '08	2
5	5321669VT/C	BLACK MONOLITE D.38- 888 '08	1
5	5321669VI/C	WHITE MONOLITE D.38- 888 '08	1
7	850956/C (replaces R5127LA)	AXLE+SCREW KIT-66/888	1
8	520349LA	AXLE SCREW -QR 20	1
9	520344PN	SCREW	6
10	520341	SCREW	2
11	5321717	CABLE CLAMP '08	1
12	533997	DUST SEAL D.38 NOK	2
13	523236	STOP RING	2
14	528361	OIL SEAL 38X50X10/10.5 NOK	2
15	538156	LOWER BUSHING D.38 H15 '08	2
16	538155	UPPER BUSHING D.38 H.15 '08	2
17	8501257/C	D.38 OIL SEALS KIT	1
18	8501256/C	D.38 BUSHINGS KIT	1
20	5471015	RH+LH BLACK LABELS-888 RCV'08	1
20	5471016	RH+LH WHITE LABELS-888 RCV'08	1
21	528030	O-RING	1
22	5321395	NUT UNIT-66/888VF'06-REB.SIDE	1
23	5321387	NUT UNIT- 66/888 FORK '06	1
24	528051	O-RING	2
25	528297	O-RING	1
26	549089>A (replaces 549089KR)	PLASTIC KNOB	1
27	549067	ADJUSTER	1
28	522244AA	WASHER	1
29	520278	SCREW	1
30	701566	PLUG UNIT 66 '08	2
31	528231	O-RING 2125	2
32	549154KR	AIR KNOB- MY 2008	1
40	8031710/R	REBOUND ROD TR.200-888RCV '08	1
41	524206	PISTON RING MTB D.38	2
42	528223	O-RING	1
43	523011	STOP RING	1
44	5141294/C	REBOUND SPRINGS KIT K=2.5	1
45	522599	WASHER	1
46	5141303	SPRING	1
47	516107	VALVE 20,3 DIA.35	1
48	509167	FERRULE MTB 38 '08	1
49	523069	STOP RING	2
50	512101	FOOT BUFFER	2
53	505108LA	CLAMP 888'06	1
54	505107LA>A (replaces 505107LA)	LOWER HANDLEBAR CLAMP 888 '06	1
55	526157KR	BUSHING	1
56	526158KR	BUSHING	1
57	505085LA	LH CLAMP -888	1
58	505084LA	RH CLAMP -888	1
70	8031711/R	COMPRES.ROD TR.200-888RCV '08	1

71	5141723	MAIN SPRING K=6,5 888 '08	1
72	536134	SPRING SPACER	1
73	509168	COMPR.FERRULE MTB 38 '08	1
74	505083LA>B (replaces 505083LA)	LOWER HANDLEBAR CLAMP- 888	1
75	5181909	PRELOAD SLEEVE 33X3X110	1
96	526145CD>B (replaces 526145AA)	BUSHING	4
97	520178	SCREW 5X20	4
98	850881/C	HANDLEBAR CLAMP KIT - 888 '04	1
99	8501030/C	HANDLEBAR CLAMP KIT - 888 '06	1

Technical characteristics: Technical characteristics

Dual-crown fork with \varnothing 38 mm legs.

Available travels: 200 mm.

Right fork leg damping element: spring (air pre-load).

Left fork leg damping element: spring (air pre-load).

Right fork leg damping system: CV Pumping rod with compression setting by external adjuster.

Left fork leg damping system: RV pumping element with external rebound adjustment.

The sliders are joined with screws to the steering crown.

New sliding system to improve stiffness and operation.

Lubrication and cooling of the parts subject to friction with a specially formulated oil.

Steer tube: steel or (optional) aluminium, 1-1/8", threadless.

Crown: aluminium alloy forged and CNC machined.

Top crown: aluminium alloy forged and CNC machined.

Stanchions: anodised aluminium.

One-piece assembly: made of magnesium alloy cast and CNC machined for lighter weight and more stiffness.

Sliding bushings: made of friction-free and wear-free material.

Springs: constant pitch.

Seals: computer designed oil seals that guarantee maximum seal in any condition.

Oil: specially formulated oil that prevents foam and keeps the viscosity unchanged while offering high performance; free from static friction.

Dropout type: \varnothing 20mm through-axle.

Disk brake mount: Post Mount for 8" disk (fitting the special adapter supplied by the brake system manufacturer you can install the 9" disk).

Max wheel size: 2.8" x 26".

Handlebar with direct clamp on top crown: available as option.

Tightening torques

Components	Tightening torque (Nm)
------------	------------------------

888 RCV - Oil levels

Position	Oil type	Quantity (cc)
Right fork leg	SAE 7,5 - 550013	310
Left fork leg	SAE 7,5 - 550013	310

